

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number  
**WO 2004/045925 A1**

(51) International Patent Classification<sup>7</sup>: **B60R 25/00**

(74) Agents: **HITCHING, Peter, Matthew et al.**; Haseltine Lake, Imperial House, 15-19 Kingsway, London WC2B 6UD (GB).

(21) International Application Number:  
PCT/GB2003/004952

(22) International Filing Date:  
14 November 2003 (14.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(30) Priority Data:  
0226747.4 15 November 2002 (15.11.2002) GB  
0311334.7 16 May 2003 (16.05.2003) GB  
60/471,542 19 May 2003 (19.05.2003) US

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicants and


(72) Inventors: **MARKS, Russell, Lee** [GB/GB]; 9a High Street, Nutfield, Surrey RH1 4HH (GB). **HEFFRON, Colin, James** [GB/GB]; 1 Neville Terrace, London SW7 3AT (GB).

Published:

— with international search report

[Continued on next page]

(54) Title: VEHICLE IMMOBILISATION DEVICE

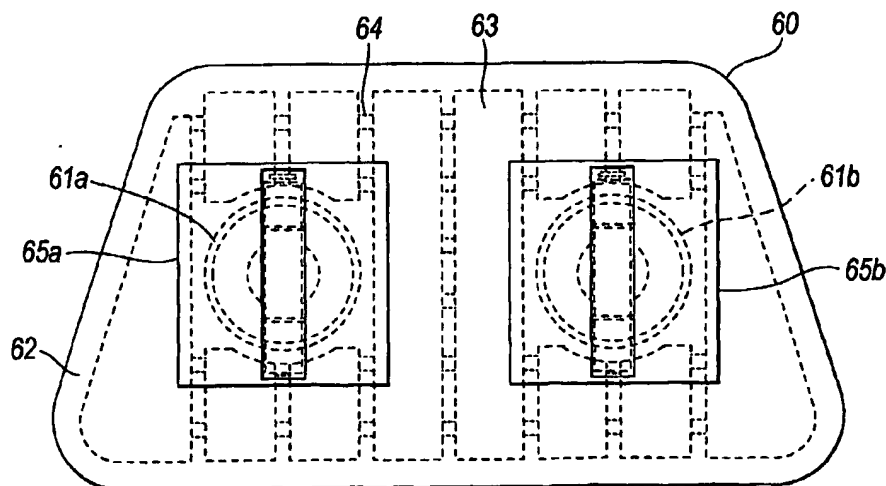

(57) Abstract: A vehicle immobilisation device (60) is provided for securing to a vehicle windscreen, comprising screening means (46a; 46b) which is changeable from a first, more compact configuration to a second configuration and which, when the device is in an in-use disposition on the vehicle windscreen, serves to impair a driver's view through the windscreen. Suction grip means (40a; 40b) are provided for holding said screening means in the in-use disposition on the windscreen by suction. Release means (51) are also provided to enable release of the suction of said suction grip means so as to allow removal of the device from the windscreen.